

ACTIVATING AND DEACTIVATING MÜSE

The Müse software requires activation. Once installed, Müse can be used for 90 days without activation. At the end of the 90 days, Müse must be activated for continued use. Müse may be activated at any time after installation.

Once installed and authenticated, if the Müse software needs to be transferred to a different workstation, the software on the old workstation must be deactivated before the new workstation can be activated.

Activating or Deactivating Müse for an Instructor Workstation

Müse Instructor Workstations specified below can be activated and deactivated online or offline:

- Online activation or deactivation requires temporary modification of the Instructor Workstation's network settings.
- The following Müse workstations can be activated online or offline:
 - BabySIM
 - ECS
 - HPS
 - iStan
 - PediaSIM

All other Müse Instructor Workstations must be activated **offline**.

- Offline activation or deactivation requires contacting CAE Healthcare Customer Service.

Activating or Deactivating Müse SCE Development Software for an SCE Development Workstation

The Müse SCE Development Software can be activated and deactivated online or offline:

- If the SCE Development Workstation is connected to the Internet, CAE Healthcare recommends activating and deactivating the software online.
- If the SCE Development Workstation is not connected to the Internet, the software can be activated or deactivated offline.

Activating Müse

The following Müse workstations can be activated online or offline:


- BabySIM
- ECS
- HPS
- iStan
- PediaSIM

All other Müse Instructor Workstations must be activated **offline**.

Activating Online

To activate Müse online:

1. If activating an Instructor Workstation, follow *steps a* through *d* below. If activating an SCE Development Workstation, skip to *step 2*.
 - a. From the **Apple®** Menu, scroll over **Location** and select **Public LAN**.

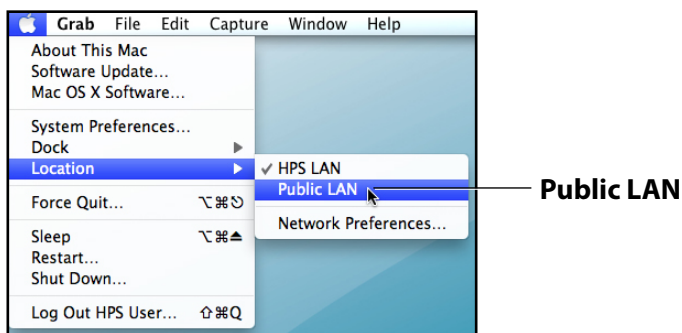

The Apple Menu

- b. On right side of the menu bar at the top of the screen, click the **Wi-Fi** icon.




The Menu Bar

The **Wi-Fi** menu appears.

- c. From the **Wi-Fi** menu, ensure that Wi-Fi is turned **On**.

NOTE: On some older Mac® computers, Wi-Fi is called AirPort.

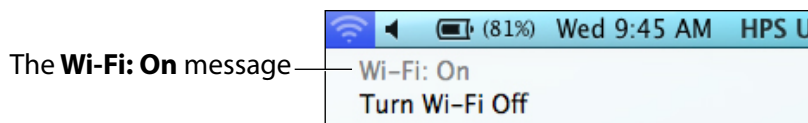


The Wi-Fi Menu

If Wi-Fi is not turned **On**, select **Turn Wi-Fi On**.



The Wi-Fi Menu

d. Select a wireless network with Internet access.

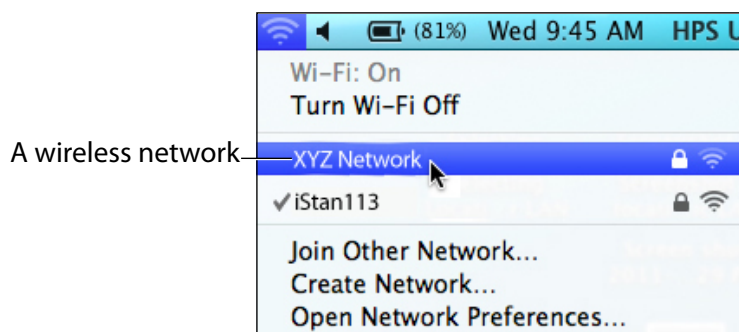


The Wi-Fi Menu

It may be necessary to enter a password to join the wireless network.

Contact your network administrator or IT professional to complete this step, if necessary.

Once the Instructor Workstation is connected to an Internet-enabled wireless network, proceed to *step 2*.

2. Launch Müse.
3. From the Müse start screen, click the **License Manager** link.

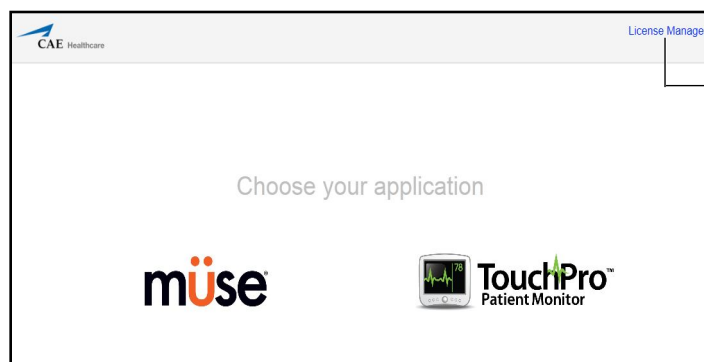

The **License Manager** link


The Müse Start Screen

The License Manager appears.




4. Click **Enter New License**.

The Product Activation screen appears.

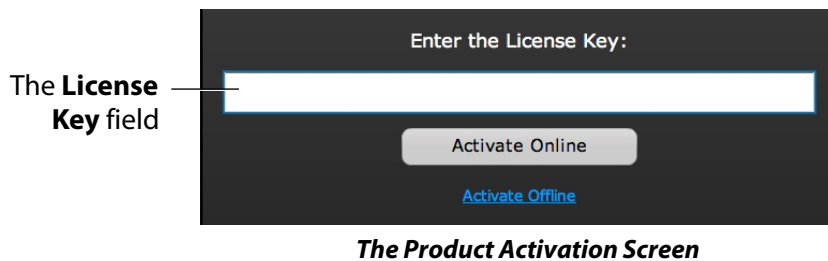


5. In the **License Key** field, enter the license key provided by CAE Healthcare.

6. Click **Activate Online**.

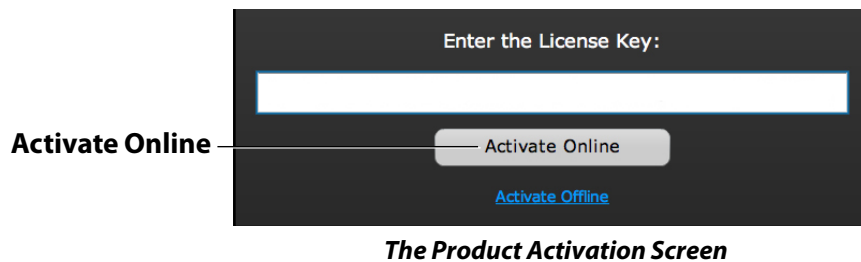

The Activating Product message appears.


After a few moments, the successful activation message appears.

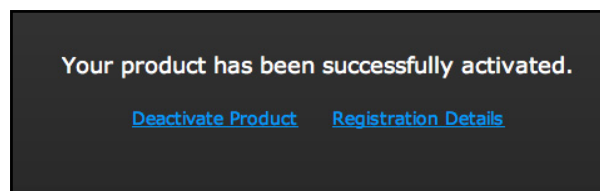

The Successful Activation Message


NOTE: It may take up to one minute after the activation process for activation to take effect.

7. If activating an SCE Development Workstation, no further action is needed.
The workstation is activated and is ready to run Müse.
If activating an Instructor Workstation, proceed to *step 8*.
8. Re-connect the Instructor Workstation to the simulator network:
 - a. Ensure the simulator is powered on.
 - b. From the **Apple** menu, scroll over **Location** and select **HPS LAN**.

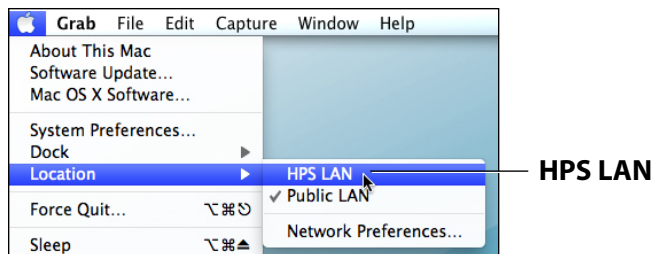

The Apple Menu


- c. On right side of the menu bar at the top of the screen, click the **Wi-Fi** icon.



The Menu Bar

The **Wi-Fi** menu appears.

- d. From the **Wi-Fi** menu, if using a wireless simulator such as iStan, select the simulator's wireless network. The simulator network is labeled with the simulator name and unit number (e.g., iStan113).

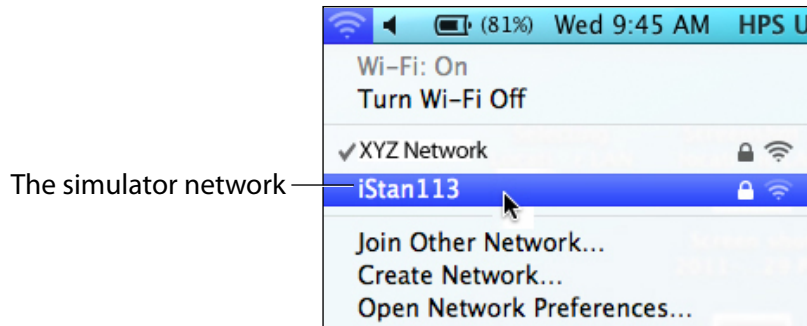

The Wi-Fi Menu

If using a wired simulator (i.e., ECS, PediaSIM ECS, BabySIM, HPS or PediaSIM HPS), select **Turn Wi-Fi Off**.

NOTE: On some older Mac computers, Wi-Fi is called AirPort.




The Wi-Fi Menu

The Instructor Workstation can now connect to the simulator and is ready to run Müse.

Activating Offline


To activate Müse offline:

1. Launch Müse.
2. From the Müse start screen, click the **License Manager** link.

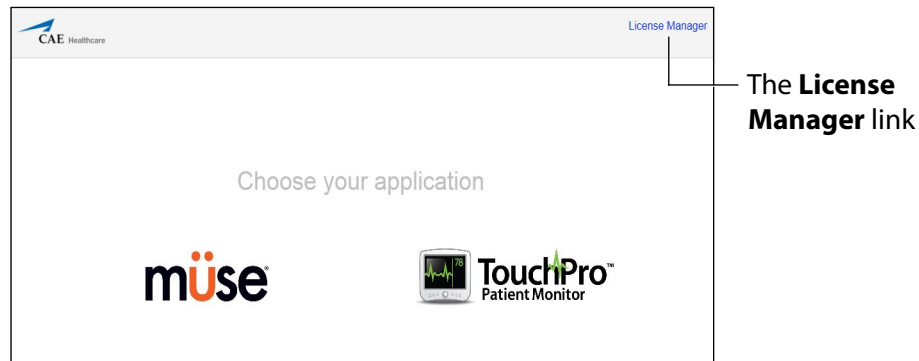

The Müse Start Screen


The License Manager appears.

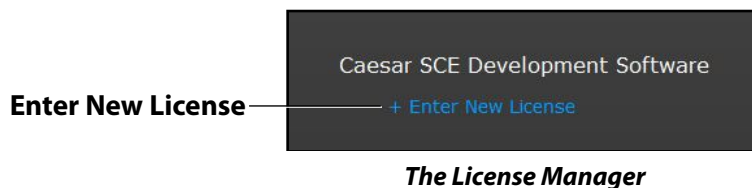

The License Manager

3. Click **Enter New License**.


The Product Activation screen appears.

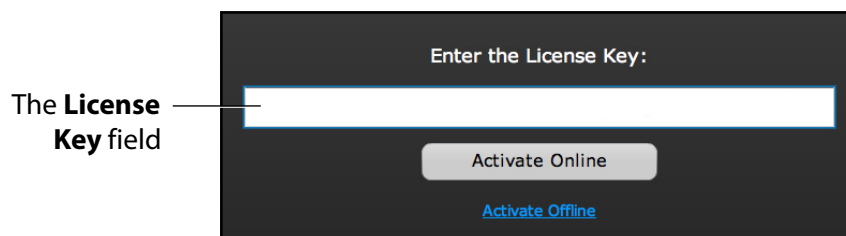

The Product Activation Screen

4. In the **License Key** field, enter the license key provided by CAE Healthcare.


5. Click the **Activate Offline** link.

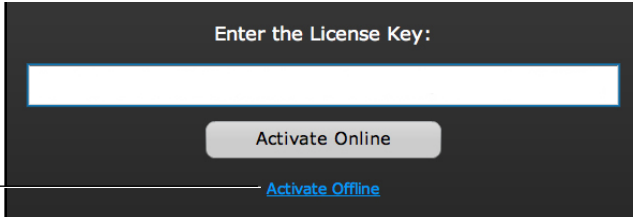

The screenshot shows a dark-themed interface with the text "Enter the License Key:" above a white input field. Below the field is a grey button labeled "Activate Online". To the left of the screen, the text "Activate Offline" is written, with a line pointing to a blue "Activate Offline" link on the screen.

The Product Activation Screen

The **Registration Key** and **Authentication Key** fields appear.

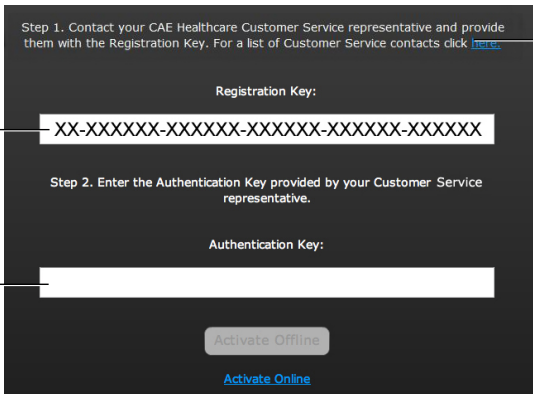

The screenshot shows a dark-themed interface with two main sections. The top section is titled "Step 1. Contact your CAE Healthcare Customer Service representative and provide them with the Registration Key. For a list of Customer Service contacts click [here](#)." and contains a "Registration Key:" label above a white input field with the text "XX-XXXXXX-XXXXXX-XXXXXX-XXXXXX". The bottom section is titled "Step 2. Enter the Authentication Key provided by your Customer Service representative." and contains an "Authentication Key:" label above a white input field. To the left of the screen, the text "The Registration Key field" and "The Authentication Key field" are written, with lines pointing to their respective input fields. To the right of the screen, the text "The Customer Service link" is written, with a line pointing to the "here" link in the top section. At the bottom of the screen are two buttons: "Activate Offline" (grey) and "Activate Online" (blue).


The Product Activation Screen

6. Call or email CAE Healthcare Customer Service and provide the registration key, which is pre-populated in the **Registration Key** field.

For CAE Healthcare Customer Service contact information, click the Customer Service link near the top of the Product Activation screen. When contacting Customer Service, please be sure to indicate whether you are requesting Activation or Deactivation.

7. In the **Authentication Key** field, enter the authentication key provided by CAE Healthcare Customer Service.

8. Click **Activate Offline**.

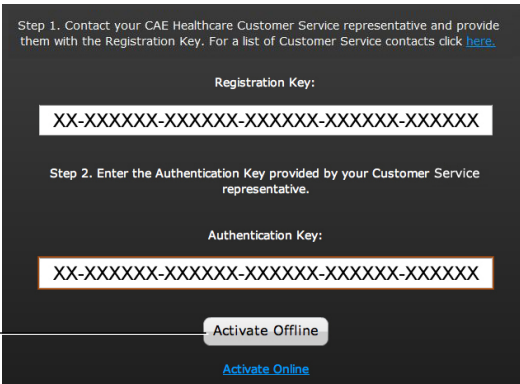

Step 1. Contact your CAE Healthcare Customer Service representative and provide them with the Registration Key. For a list of Customer Service contacts click [here](#).

Registration Key:

XX-XXXXXX-XXXXXX-XXXXXX-XXXXXX

Step 2. Enter the Authentication Key provided by your Customer Service representative.


Authentication Key:

XX-XXXXXX-XXXXXX-XXXXXX-XXXXXX

Activate Offline — [Activate Online](#)

The Product Activation Screen

The successful activation message appears.

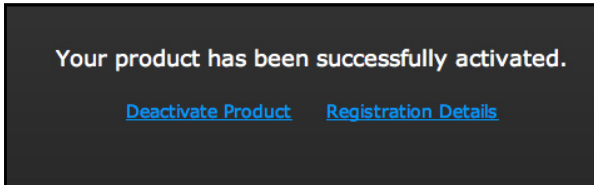

Your product has been successfully activated.

[Deactivate Product](#) [Registration Details](#)

The Successful Activation Message

NOTE: It may take up to one minute after the activation process for activation to take effect.

Deactivating Müse

The following Müse workstations can be activated online or offline:

- BabySIM
- ECS
- HPS
- iStan
- PediaSIM


All other Müse Instructor Workstations must be activated **offline**.

IMPORTANT: Deactivating a workstation causes the Müse software on the workstation to stop functioning. Only deactivate a workstation when you are sure you no longer need to use it with the Müse software.

Deactivating Online


To deactivate a Müse workstation online:

1. If deactivating an Instructor Workstation, follow *steps a* through *d* below. If deactivating an SCE Development Workstation, skip to *step 2*.
 - a. From the **Apple** menu, scroll over **Location** and select **Public LAN**.

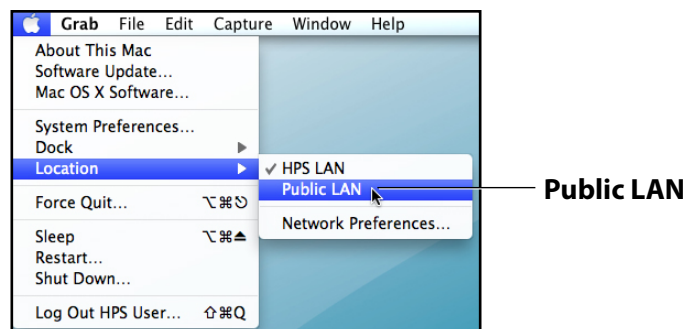

The Apple Menu

- b. On right side of the menu bar at the top of the screen, click the **Wi-Fi** icon.




The Menu Bar

The **Wi-Fi** menu appears.


- c. From the **Wi-Fi** menu, ensure that Wi-Fi is turned **On**.

NOTE: On some older Mac computers, Wi-Fi is called AirPort.

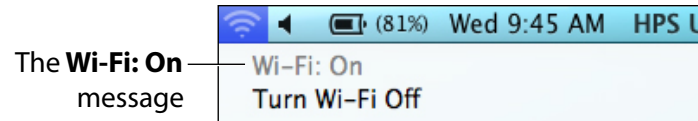


The Wi-Fi Menu

If Wi-Fi is not turned **On**, select **Turn Wi-Fi On**.



The Wi-Fi Menu

- d. Select a wireless network with Internet access.

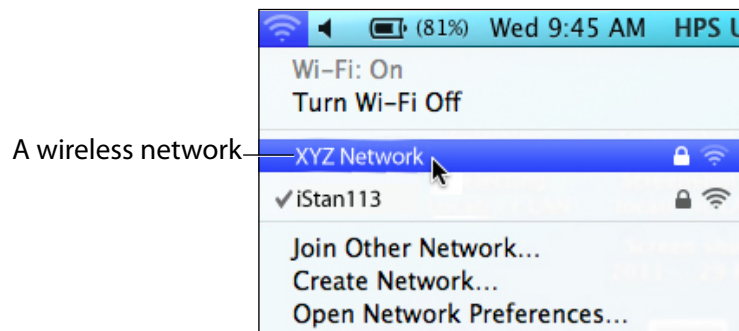

The Wi-Fi Menu


It may be necessary to enter a password to join the wireless network.

Contact your network administrator or IT professional to complete this step, if necessary.

Once the Instructor Workstation is connected to an Internet-enabled wireless network, proceed to *step 2*.


2. Launch Müse.

3. From the Müse start screen, click the **License Manager** link.

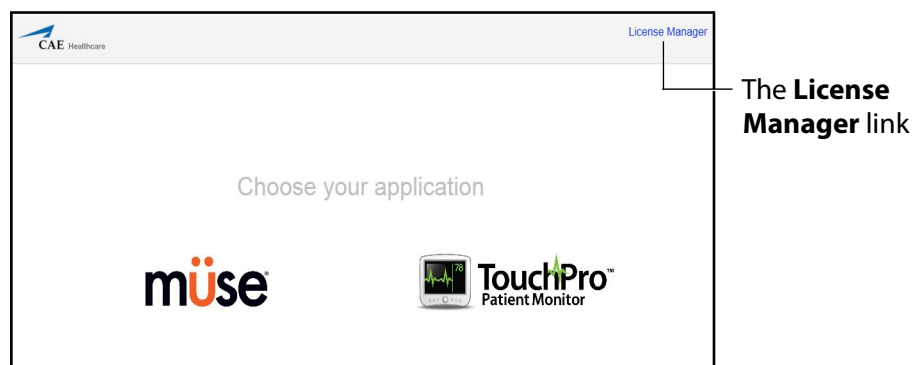

The Müse Start Screen


The License Manager appears.

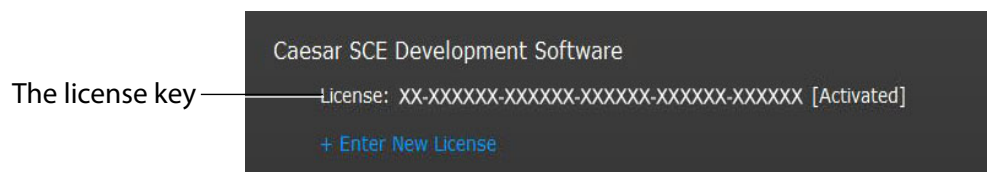

The License Manager

4. From the License Manager, make a note of the license key to be deactivated. This license key will be needed if you wish to activate a new workstation.
5. Click on the license key to be deactivated.


The Product Activation screen appears.

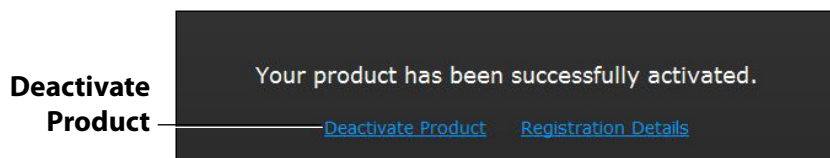

The Product Activation Screen

6. On the Product Activation screen, click the **Deactivate Product** link.

The Product Deactivation screen appears. The license key field is pre-populated.

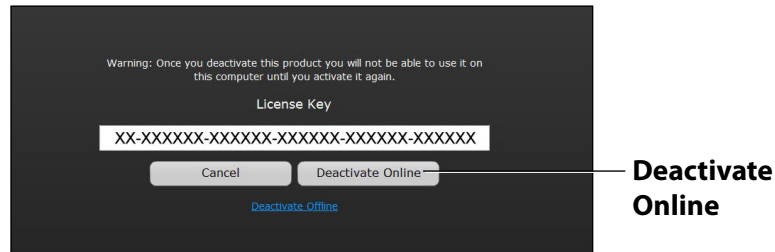


The Product Deactivation Screen

7. Click **Deactivate Online**.

The Deactivating Product message appears.

After a few moments, the successful deactivation message appears.

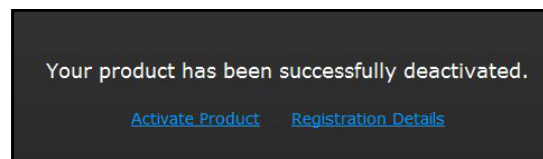


The Successful Deactivation Message

NOTE: It may take up to one minute after the deactivation process for deactivation to take effect.

8. If deactivating an SCE Development Workstation, no further action is needed. The workstation has been is deactivated.


If deactivating an Instructor Workstation, proceed to *step 9*.

9. Re-connect the Instructor Workstation to the simulator network:
 - a. Ensure the simulator is powered on.
 - b. From the **Apple** menu, scroll over **Location** and select **HPS LAN**.

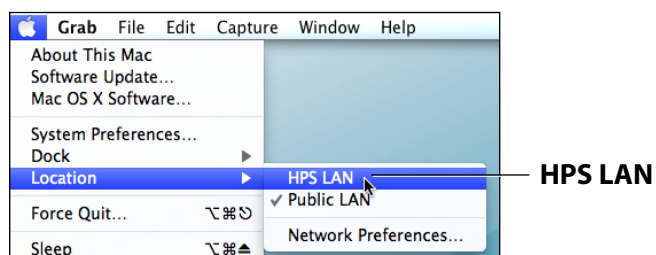


The Apple Menu

- c. On right side of the menu bar at the top of the screen, click the **Wi-Fi** icon.




The **Wi-Fi** menu appears.

- d. From the **Wi-Fi** menu, if using a wireless simulator such as iStan, select the simulator's wireless network. The simulator network is labeled with the simulator name and unit number (e.g., iStan113).

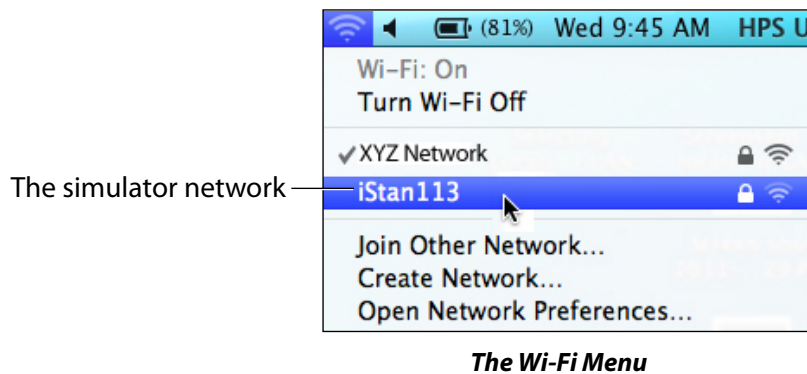

If using a wired simulator (i.e., ECS, PediaSIM ECS, BabySIM, HPS or PediaSIM HPS), select **Turn AirPort Off**.

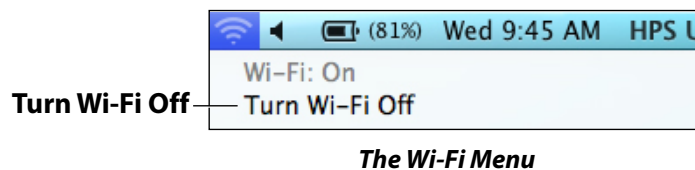


The Instructor Workstation has been deactivated and restored to its original network settings.

Deactivating Offline


To deactivate a Müse workstation offline:

1. From the Müse start screen, click the **License Manager** link.

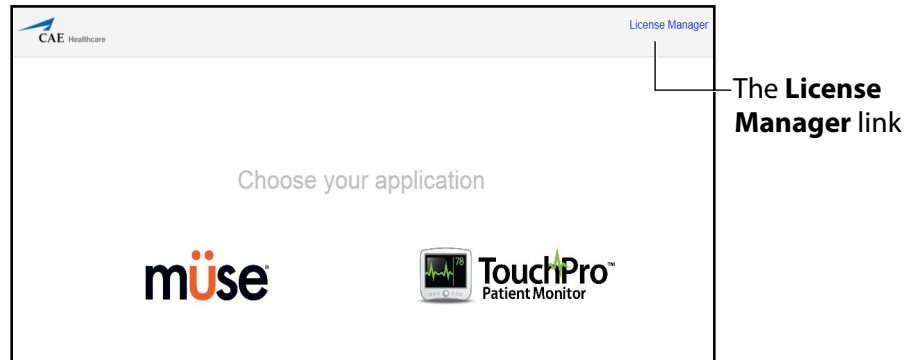

The Müse Start Screen


The License Manager appears.

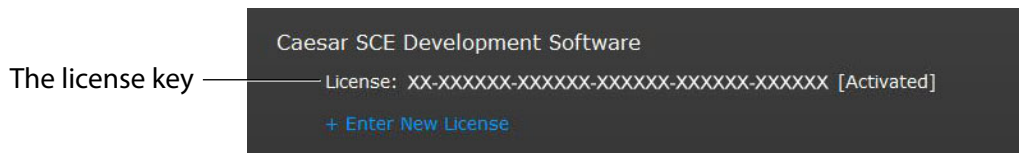

The License Manager

2. From the License Manager, make a note of the license key to be deactivated. This license key will be needed if you wish to activate a new workstation.
3. Click the license key to be deactivated.


The Product Activation screen appears.

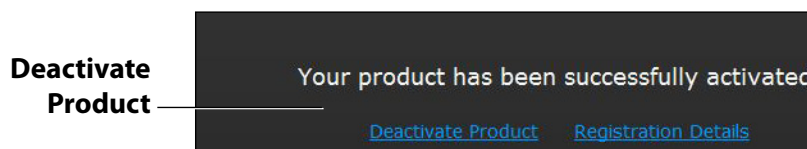

The Product Activation Screen


4. Click **Deactivate Product**.

The Product Deactivation screen appears. The **License Key** field is pre-populated.

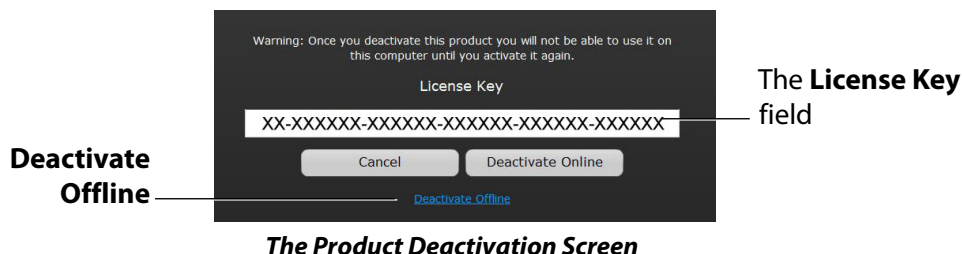

5. Click **Deactivate Offline**.

The **Registration Key** and **Deauthentication Key** fields appear.

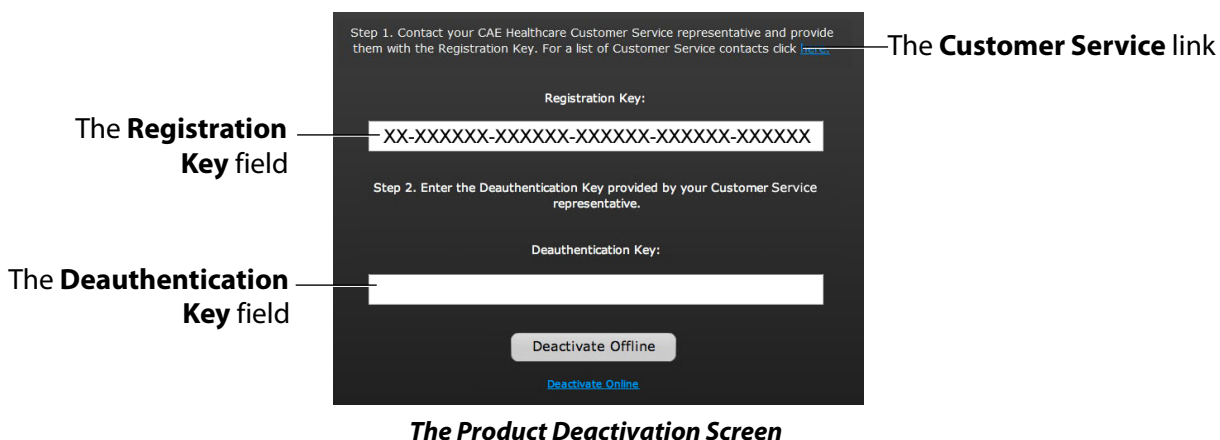


6. Call or email CAE Healthcare Customer Service and provide the registration key, which is pre-populated in the **Registration Key** field.

For CAE Healthcare Customer Service contact information, click the Customer Service link near the top of the Product Deactivation screen. When contacting Customer Service, please be sure to indicate whether you are requesting Activation or Deactivation.

7. In the **Deauthentication Key** field, enter the deauthentication key provided by Customer Service.

8. Click **Deactivate Offline**.

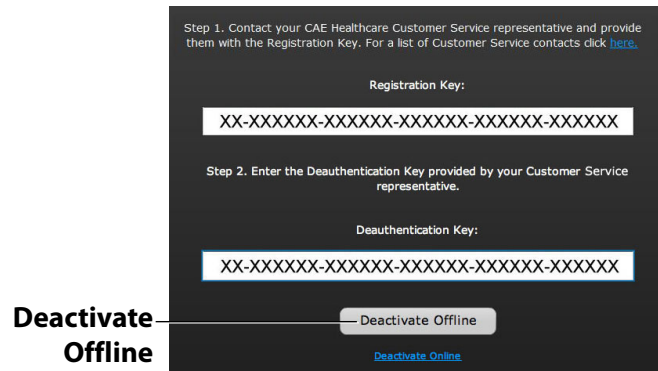

Step 1. Contact your CAE Healthcare Customer Service representative and provide them with the Registration Key. For a list of Customer Service contacts click [here](#).

Registration Key:

XX-XXXXXX-XXXXXX-XXXXXX-XXXXXX

Step 2. Enter the Deauthentication Key provided by your Customer Service representative.

Deauthentication Key:

XX-XXXXXX-XXXXXX-XXXXXX-XXXXXX

Deactivate Offline — Deactivate Offline

[Deactivate Online](#)

The Product Deactivation Screen

A confirmation key appears.



Step 3. Contact your CAE Healthcare Customer Service representative and provide them with the Confirmation Key.

Confirmation Key:

A6-35DCF3-A0A3EB-7815B3-CAF042-CED909

Complete — Complete

Warning: You must perform this step to complete deactivation.


The Product Deactivation Screen

9. Provide the confirmation key to Customer Service.

IMPORTANT: You MUST complete this step in order to complete your product deactivation. If you do not complete this step, you will be unable to activate a new SCE Development Workstation in place of the old workstation.

10. Click **Complete**.

The successful deactivation message appears.

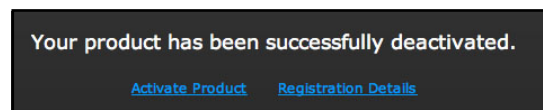

Your product has been successfully deactivated.

[Activate Product](#) [Registration Details](#)

The Successful Deactivation Message

NOTE: It may take up to one minute after the deactivation process for deactivation to take effect.